



# Material

---



## Key

- PUR foam
- Polypropylene (PP)
- Polyamide PA6
- Polyamide PA6 reinforced with fiber glass
- Polyoxymethylene (POM)
- Acrylonitrile-Butadiene-Styrene (ABS reinforced with fier glass)
- Aluminium
- Steel parts - coated

## Materials

---

The way in which Eyla is constructed allows the chair to be dismantled at the end of its working life in order to recycle most of the parts. A detailed list of the materials used follows:

### **Polyamide PA6 reinforced with 10–50% fiber glass**

Properties: The flash point of the material lies at 400 °C. The ignition temperature lies at 450 °C. Thermal decomposition occurs when the part is subjected to a temperature of 350 °C.

Recycling: Yes – the parts can be recycled.

System parts: Seat shell, mechanical components

### **Polyamide (PA6/PA6.6)**

Properties: The flash point of the material lies at 400 °C. The ignition temperature lies at 450 °C. Thermal decomposition occurs when the part is subjected to a temperature of 350 °C.

Recycling: Yes – the parts can be recycled.

System parts: Castors, glides, buttons, covers

### **Polyoxymethylene (POM)**

Properties: The flash point of the material lies at 370 °C. The ignition temperature lies at 400 °C. Thermal decomposition occurs when the part is subjected to a temperature of 220 °C.

Recycling: Yes – the parts can be recycled.

System parts: Covering tube holder, height column covering guide, mechanical components

### **Acrylonitrile-Butadiene-Styrene (ABS/ABS reinforced with fiber glass)**

Properties: The flash point is not applicable. The ignition temperature lies at 330 °C. Thermal decomposition occurs when the part is subjected to a temperature of 300–320 °C.

Recycling: Yes – the parts can be recycled.

System parts: Upholstered shell

### **Polypropylene (PP)**

Properties: The flash point is not applicable. The ignition temperature lies at 330 °C. Thermal decomposition occurs when the part is subjected to a temperature of 300–320 °C.

Recycling: Yes – the parts can be recycled.

System parts: Armrest caps

### **Thermoplastic elastomer (TPU)**

Recycling: Yes, the parts can be sent for either materials or thermal recycling.

System parts: End-stop buffer mechanism

### **PUR foam**

Properties: All PUR foam parts (polyurethane) in versions made of cold cured foam or integral foam are produced without any CFCs and are created by means of a polyaddition reaction of isocyanate and polyether polyol. This results in cellular material with elastic properties. Thermal decomposition takes place at a temperature of over 180 °C, and the ignition temperature is between 315 °C and 370 °C.

Recycling: Yes, the parts can be sent for either materials or thermal recycling.

System parts: Seat cushion, back cushion

### **Steel parts**

Properties: The parts are of very high strength with regard to breakage, traction, torsion and bending. The level of strength is higher or lower, depending on the quality grade. The parts are corrosionresistant after electroplating. Thermal decomposition occurs when the part is subjected to a temperature of 1100 °C.

Recycling: Yes – the parts can be recycled.

System parts: Back frame, mechanical components, bolts, springs, washers, screws

### **Steel parts – coated (resin)**

Properties: The parts are of very high strength with regard to breakage, traction, torsion and bending. The level of strength is higher or lower, depending on the quality grade. The parts are corrosionresistant after electroplating. Epoxy resin powder is used to coat the parts. Thermal decomposition occurs when the part is subjected to a temperature of 1100 °C.

Recycling: Yes – the parts can be recycled.

System parts: Height column, height column coverings, armrest support

### **Aluminium (pressure die casting) raw and polished**

Properties: The alloy corresponds to the DIN 1706 standard. Aluminium die casting has a high level of strength, is easily shaped and offers several finishing methods. There are different polishing levels as well as different epoxy resin powder coatings in an extensive range of colours.

Recycling: Yes – the parts can be recycled.

System parts: Seat support, back support, five-prong base, four-prong base, armrests

### **Cover materials**

Properties: Detailed information on the composition of materials can be found on the respective fabric and leather cards.

Recycling: Yes – some of the unblended cover fabrics made from natural fibers can be returned to the suppliers. There, the covers are shredded and reused to produce new fabric. Cover fabrics made from synthetic materials can be recycled. The methods used to tan and dye the leather covers allow them to be composted without problem.

System parts: Cloth and leather covers

### **Additional information – connections**

Eyla is made from a large number of single parts. The parts are all mechanically joined (= can be dismantled, detached). These plug-in and screw connections allow the different types of material to be separated when the chair is dismantled.

Exception: For the backrest foam, the back frame and straps are covered with foam. The armrest cap is glued to the armrest.

### **Additional information – material identification**

The larger parts made of Polypropylene (PP), Polyamide (PA), Polyoxymethylene (POM) and Acrylonitrile-Butadiene-Styrene (ABS) are marked with the respective material identification code for recycling.



## Certificates

### Quality

Girsberger has extremely high quality assurance standards and is certified according to DIN EN ISO 9001.

### Environment

Since 2007, Girsberger has operated an environmental management system certified to the EN ISO 14001 standard, which obliges us to continually improve our environmental performance. All materials used for the Eyla model series can be sorted into material types and recycled.

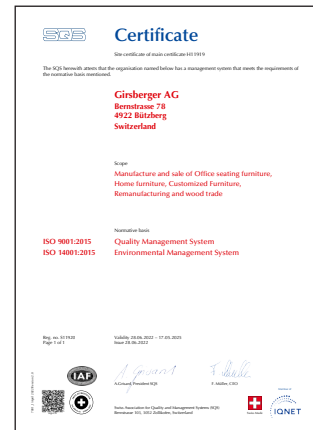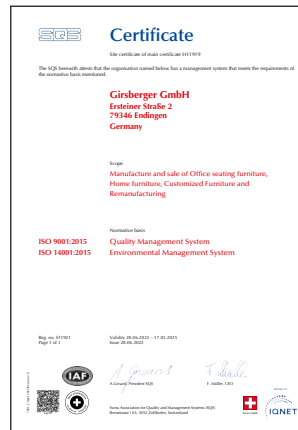

### Functionality and safety


The design of the products in the Eyla model series conforms with the following standards:

EN 16139

The safety of the Eyla product series has been tested and confirmed by TÜV LGA with the issue of the GS («safety approved») certificate.

Moreover, TÜV LGA has issued its «tested for hazardous substances» certificate for the Eyla.

The «Quality Office» certificate from the BSO Verband (German association of office, seating and commercial furniture companies) and the Verwaltungs-Berufsgenossenschaft (German provider of statutory accident insurance) attests to the above-average quality of the Eyla model series.

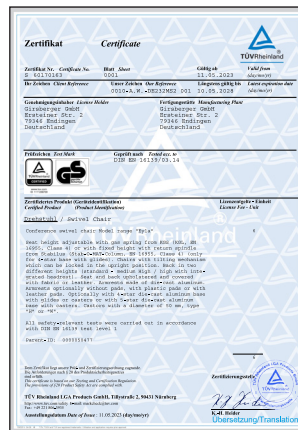

### Design

In 2022, Girsberger won the red dot award for the design of the Eyla chair.



reddot winner 2022

mail@girsberger.com  
www.girsberger.com